

FIG. 1

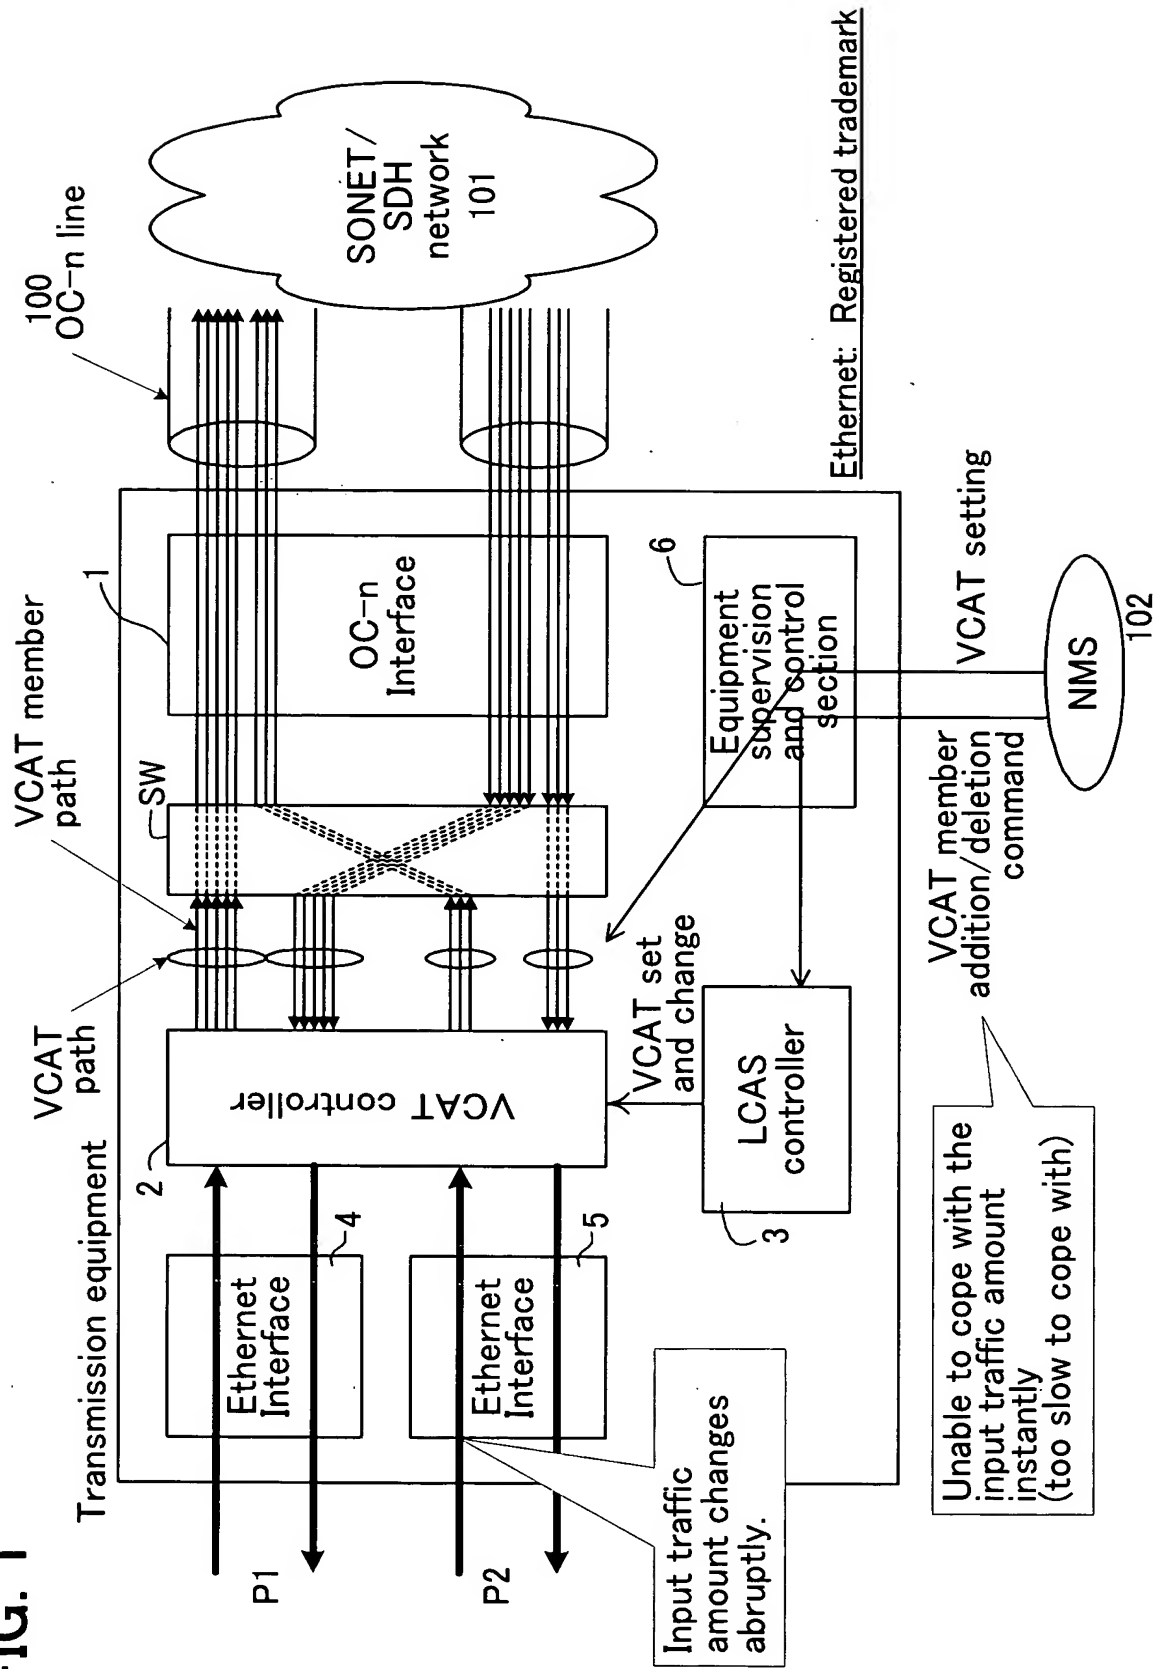
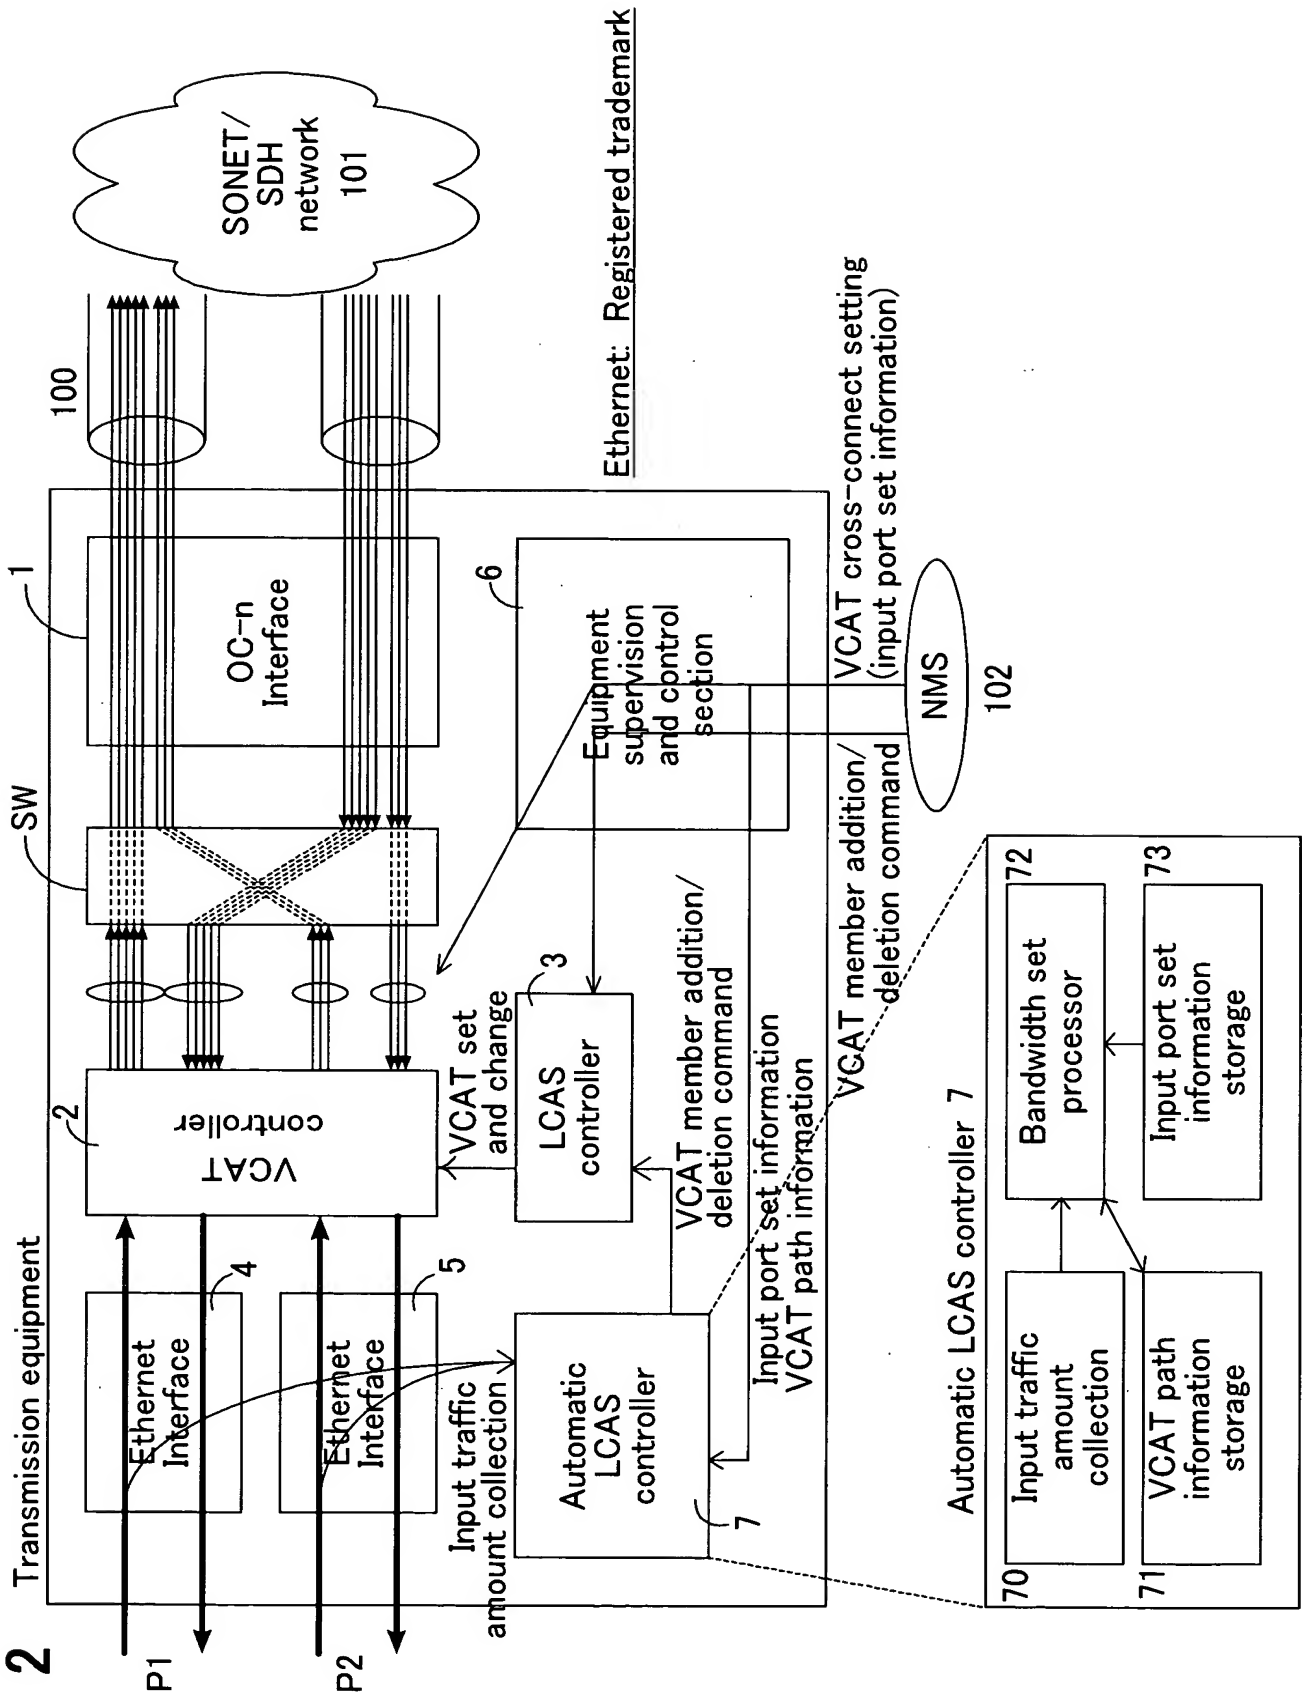


FIG. 2



**FIG. 3**

VCAT member path ID	Path destination	Input port ID
VC#1	Node#A	1
VC#2	Node#A	1
VC#3	Node#A	2
VC#4	Node#A	2

**FIG. 4**

Input port ID	Bandwidth allocation priority	Minimum guarantee bandwidth
1	5	100Mbps
2	10	150Mbps

**FIG. 5**

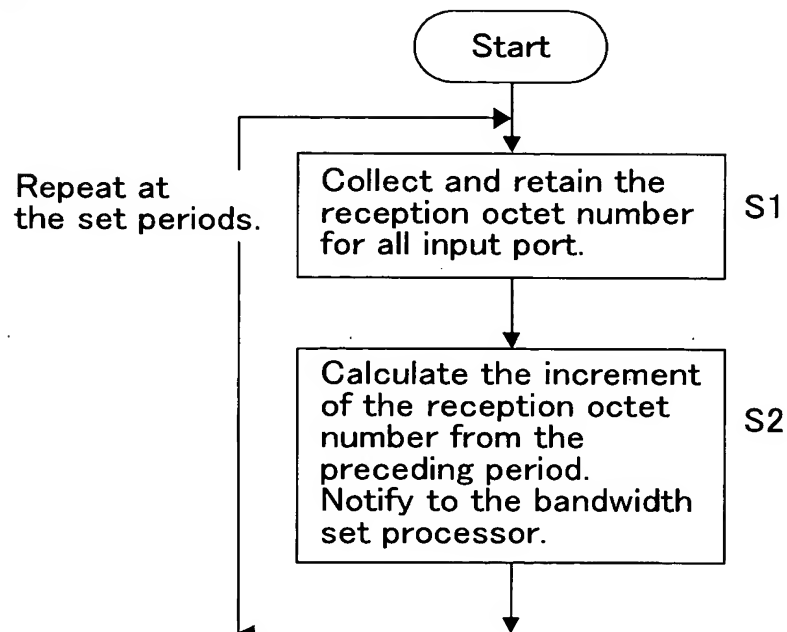
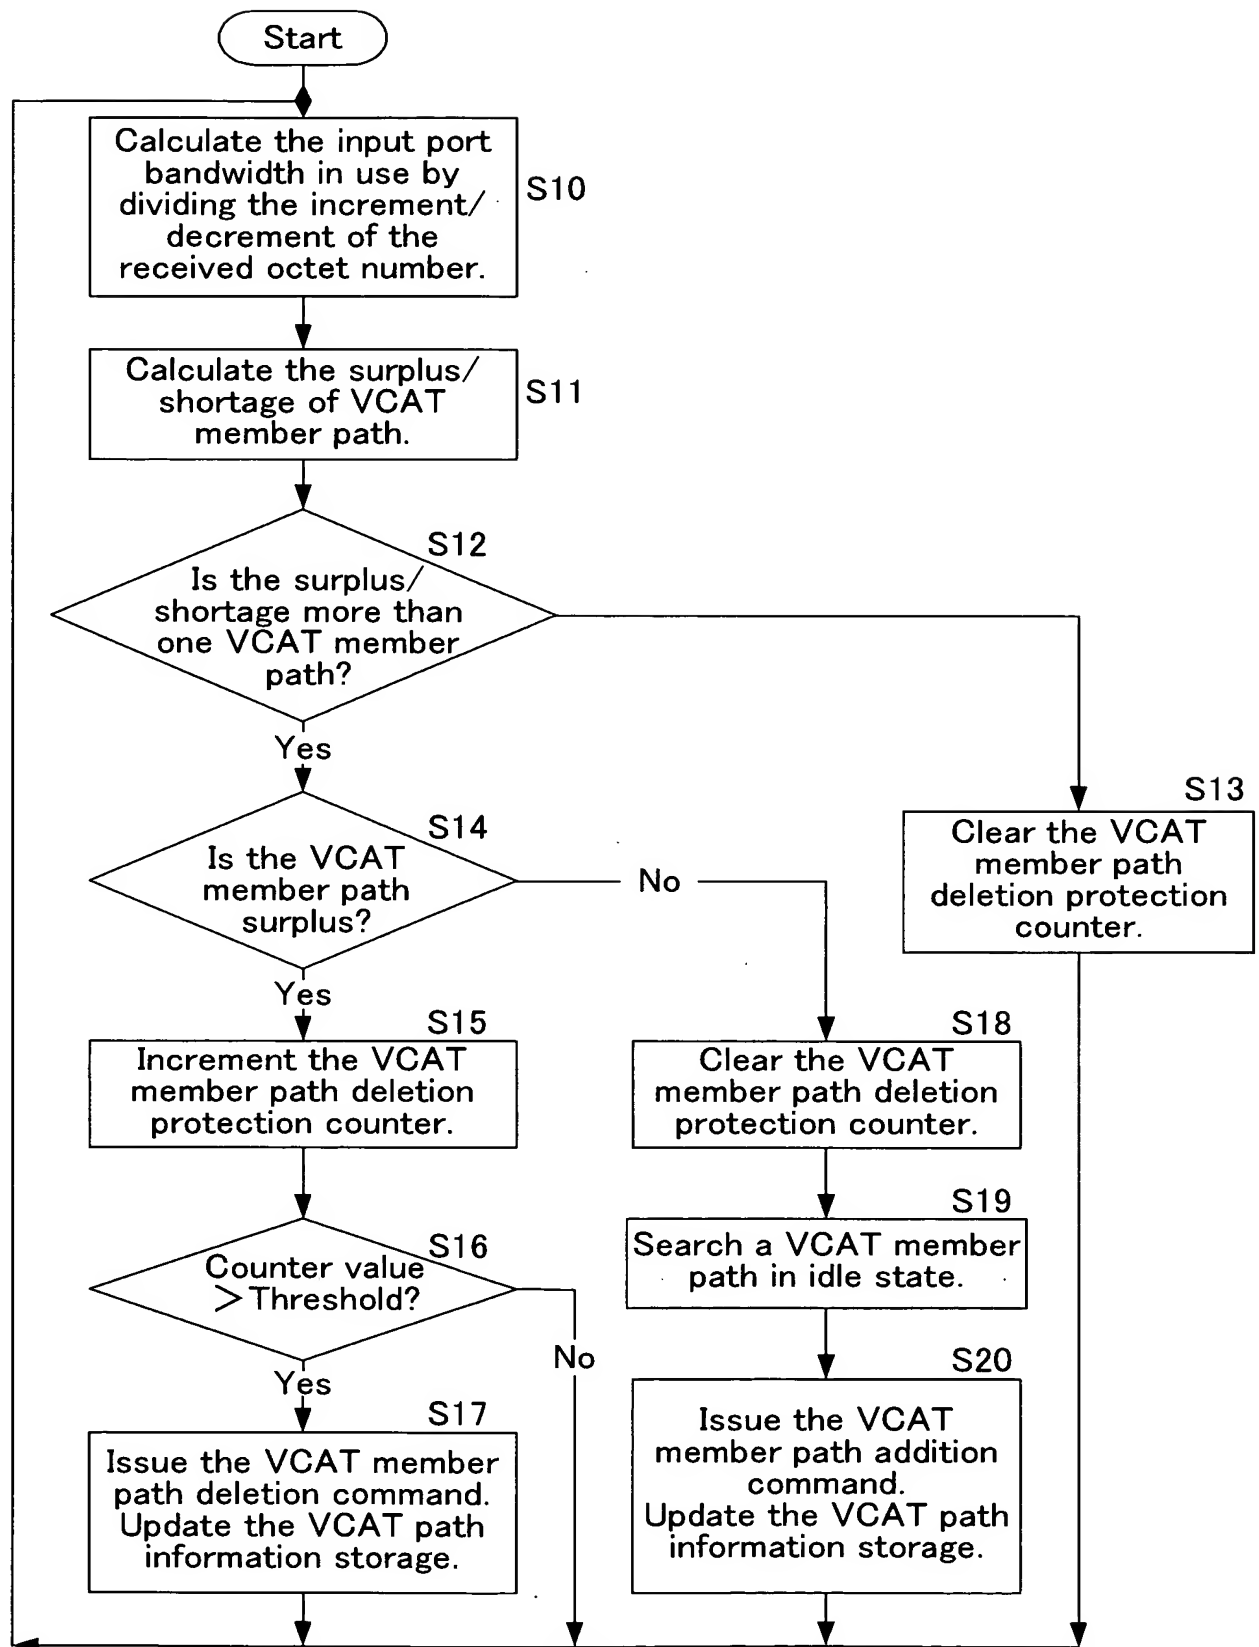


FIG. 6



**FIG. 7**

Value msb...lsb	Command	Remarks
0000	FIXED	This is an indication that this end uses fixed bandwidth (non-LCAS mode)
0001	ADD	This member is about to be added to the group
0010	NORM	Normal transmission
0011	EOS	End of Sequence indication and Normal transmission
0101	IDLE	This member is not part of the group or about to be removed
1111	DNU	Do Not Use (the payload) the Sk side reported FAIL status